




DOWNLIGHTS

- Our range of downlights has you covered, whether you need to retrofit and replace existing halogen or CFL downlights, or if you're designing a new build, we have the range to meet your needs.
- All of our Downlights are UV, IR and Flicker free.
- Efficient LED technology means you can save up to 50% on your energy costs using LED
- Multiple beam angles, lumen packages, CCT options can be selected to suit your project's needs.
- All of our downlights can be provided with dimming compatibility.
- All of our Downlights have up to 50,000 hours functional life and a full replacement warranty.
- We have Photometric data, LM79 and LM80 reports plus compliance for ALL of the luminaires in this range.
- General Innovation Australia is a registered responsible supplier.
- Warranty Terms & Conditions available on request.

DOWNLIGHTS



► Multichip 103

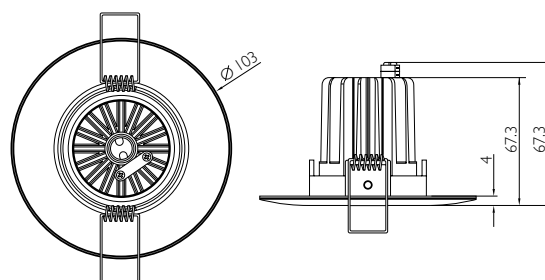

Model	Volts	Watts	Kelvin	Lumen	CRI	Cutout
MTGDL10W3KD-6090-W	240	10	3000	500	84	75-90mm
MTGDL10W4KD-6090-W	240	10	4000	550	84	75-90mm
MTGDL10W3KD-6090-S	240	10	3000	500	84	75-90mm
MTGDL10W4KD-6090-S	240	10	4000	550	84	75-90mm

S = Silver W = White





WIDE

DOWNLIGHTS



► Integral Downlight



Model	Volts	Watts	Kelvin	Lumen	CRI	Cutout
MTGDL11W-VI	240	11	3000/4000	800	80/90	95mm




WIDE

DOWNLIGHTS



► Reflector COB

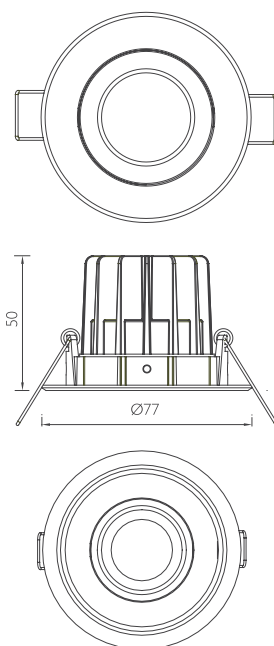

IP20



RoHS



Gimble



Dimmable
Option

Model	Volts	Watts	Kelvin	Lumen	CRI	Cutout
MTGDL11W	240	11	3000/4000	750	80	70mm



WIDE




MEDIUM

DOWNLIGHTS



► Deep Can

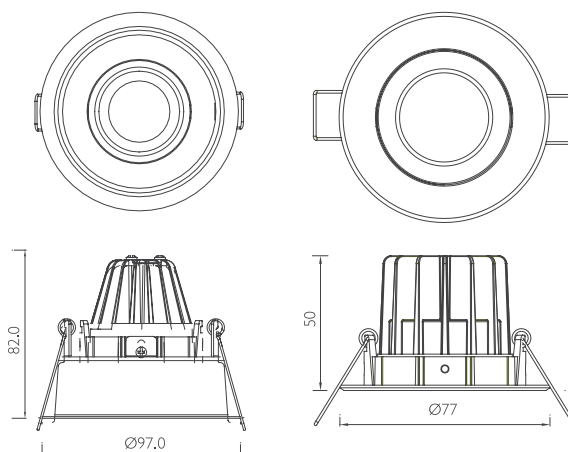

IP20



RoHS




WIDE



MEDIUM

Model	Volts	Watts	Kelvin	Lumen	CRI	Cutout
MTGDLCAN8W	240	8	3000/4000	500	80	97mm
MTGDLCANI1W	240	11	3000/4000	750	80	90mm


DOWNLIGHTS

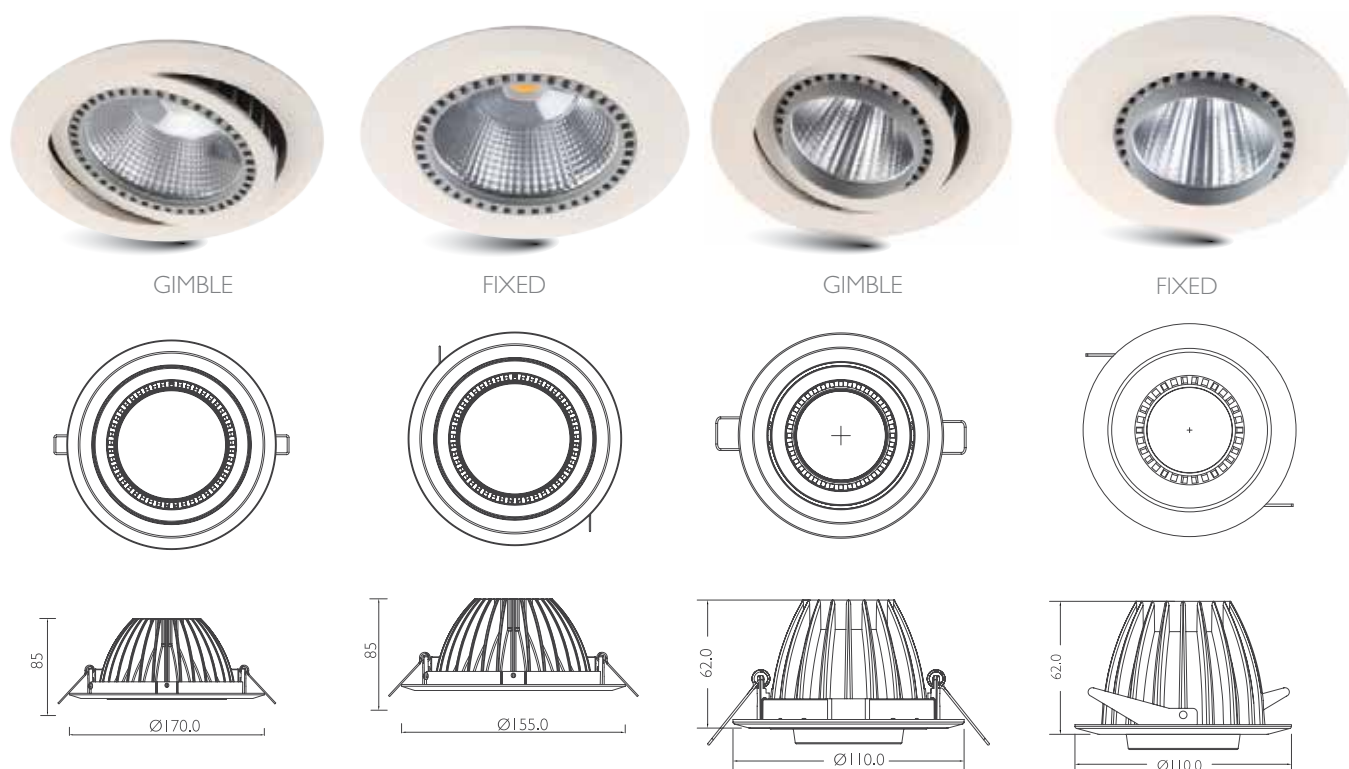





► Commercial COB



Model	Volts	Watts	Kelvin	Lumen	CRI	Cutout
MTGDL11W-G	240	11	3000	750	80	95mm
MTGDL11W-F	240	11	3000	750	80	80mm
MTGDL28W-G	240	28	3000	2400	80	95mm
MTGDL28W-F	240	28	3000	2400	80	80mm

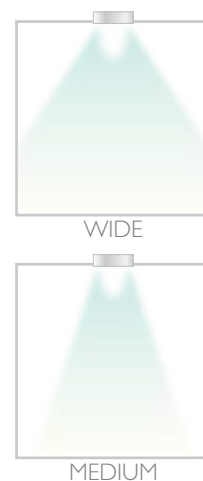

DOWNLIGHTS



► Wall Wash Downlight



IP20



RoHS



Gimble



Dimmable
Option

Model	Volts	Watts	Kelvin	Lumen	CRI	Cutout
MTGDL15W-G60	240	15	3000	1450	80/90	140mm
MTGDL28W-G60	240	28	3000	2400	80	170mm




WIDE



NARROW


DOWNLIGHTS

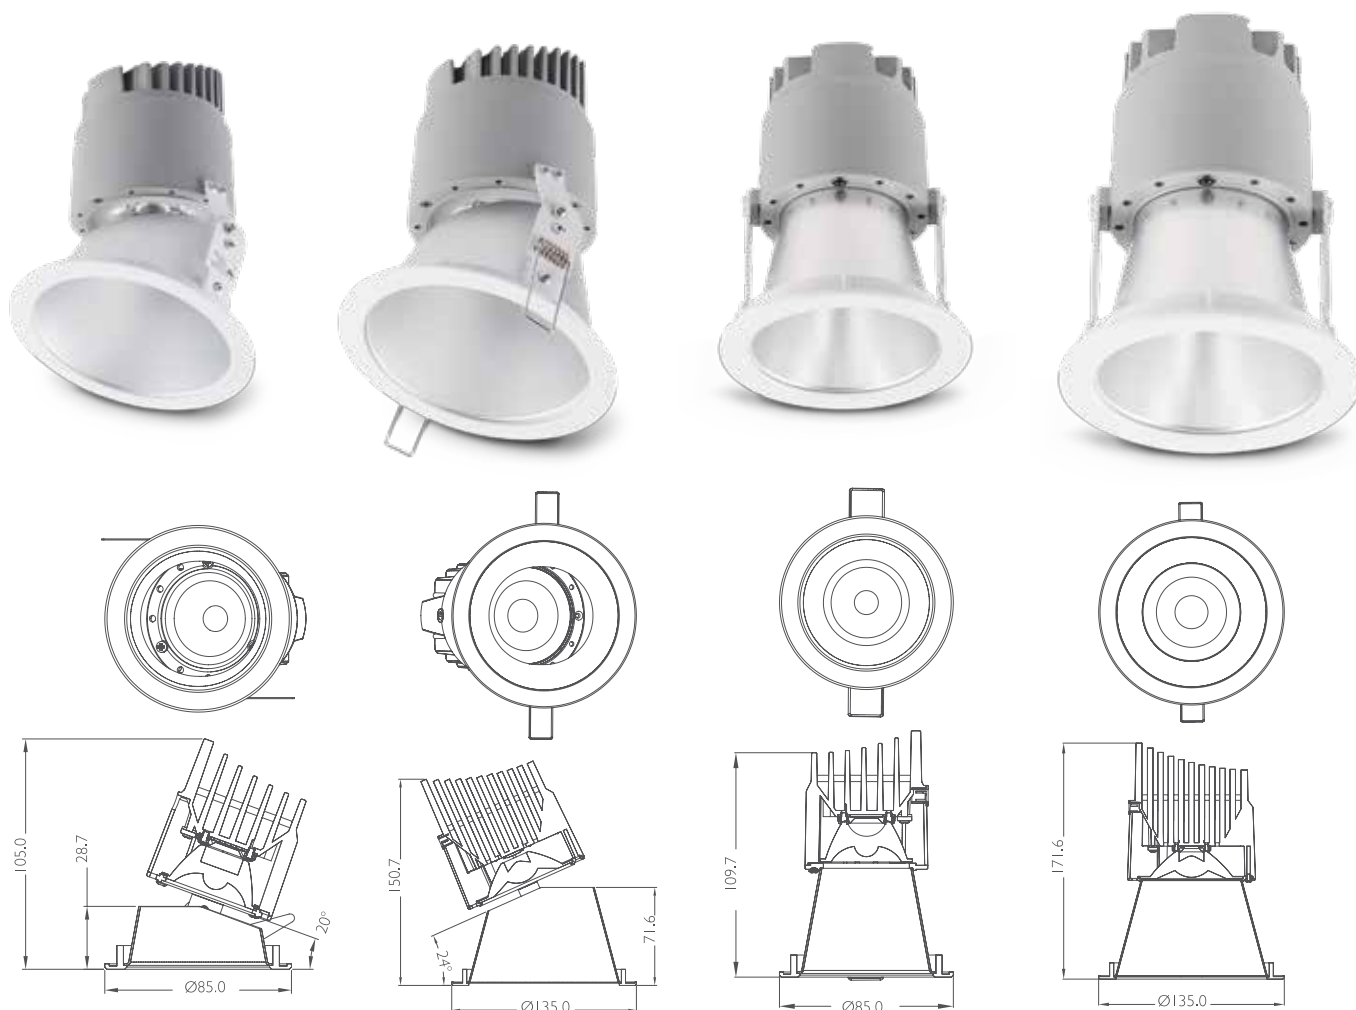


► Retail Recessed Series



Model	Volts	Watts	Kelvin	Lumen	CRI	Cutout
MTGDL11W-V2F	240	11	3000/4000	800	90	75mm
MTGDL23W-F	240	23	3000/4000	2000	90	125mm
MTGDL11W-V2G	240	11	3000/4000	800	90	75mm
MTGDL23W-G	240	23	3000/4000	2000	90	125mm



GIMBLE




FIXED

DOWNLIGHTS



► Adjustable AR111 Matrix Spotlights

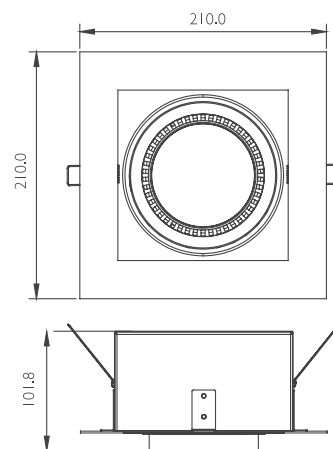

Model	Volts	Watts	Kelvin	Lumen	CRI	Dimensions	Cutout
MTGDL28W-SQ	240	28	3000/5000	2200/2400	80	210x210x100mm	190x190
MTGDL56W-SQ	240	56	3000/5000	4600/5000	80	335x210x100mm	315x190
MTGDL84W-SQ	240	84	3000/5000	6500/7000	80	510x210x100mm	470x190



WIDE



NARROW

DOWNLIGHTS



33W


22W

11W

► Matrix Spotlights



44W

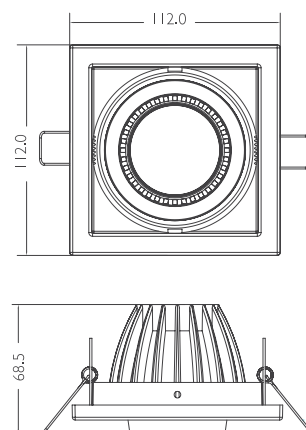

IP20



RoHS



Model	Volts	Watts	Kelvin	Lumen	CRI	Dimensions	Cutout
MTGDL11W-SQ	240	11	3000	800	80	112x112x68.5mm	100x100
MTGDL22W-SQ	240	22	3000	1600	80	224x112x68.5mm	210x100
MTGDL33W-SQ	240	33	3000	2400	80	336x112x68.5mm	320x100
MTGDL44W-SQ	240	44	3000	3200	80	224x224x68.5mm	210x210



NARROW

DOWNLIGHTS



MTGDL9W3K-9090-W




MTGDL13W4K-9090-W




MTGDL30W




MTGDL50W




MTGDL9W3K-9090-W







MTGDL13W4K-9090-W



MTGDL30W4K-90210-W



MTGDL50W4K-90250-W



► Diffused Slim Downlight



Model	Volts	Watts	Kelvin	Lumen	CRI	Cutout	
MTGDL9W3K-9090-W	240	9	3000	500	84	90mm	CORE
MTGDL9W4K-9090-W	240	9	4000	550	84	90mm	
MTGDL13W3K-9090-W	240	13	3000	1250	83	90mm	
MTGDL13W4K-9090-W	240	13	4000	1300	80	90mm	
MTGDL50W4K-90250-W	240	50	4000	4400	80	250mm	SPECIAL ORDER
MTGDL30W4K-90210-W	240	30	3000	3000	83	210mm	
MTGDL30W4KD-90210-W	240	30	3000	3100	83	210mm	



CCT Options: 3000K, 4000K, 5000K, 6000K.